

KERN IOC 100K-2LM

Allround platform scale with a wide range of communication options, verification optional



Accuracy classe	III
Verification scale interval [e]	0,02 kg; 0,05 kg
Conformity assessment possible ex works	✓

Display	
Display type	LCD
Display type	LCD
Display screen size	110×35 mm
Display backlight	✓
Display digit height - smallest digit	25 mm
Display digit height	25 mm
Languages of the user interface	Symbol language

Construction	
Dimension display device (W×D×H)	268×115×80 mm
Dimensions weighing platform (W×D×H)	650×500×150 mm
Material display housing	Plastics
Material weighing plate	stainless steel
Material platform	mild steel
Dimensions weighing surface (W×D)	650×500 mm
Display device cable length	3 m
Material load cell(s)	aluminium
Load cells - number	1
Levelling feet adjustable	✓
Wall mount	✓
Stand inclinable	✓

Functions	
Number of keys for operation	7
Auto-off interval(s) in mains power mode	3 min
	off
	5 min
	30 min
Auto-off interval(s) in battery mode/rechargeable battery mode	15 min
	3 min
	off
	5 min
PreTare function	30 min
	15 min
	✓
Tare function	✓
Percentage determination	manual (multi)
Counting function	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	✓
	acoustically
	visual

Category	
Brand	KERN
Product category	Industrial scale
Product group	Platform scale
Product family	IOC

Measuring System	
Construction type of the scale	Multi-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	60 kg; 150 kg
Readability [d]	0,02 kg; 0,05 kg
Resolution	3.000, 3.000
Linearity	± 0,02 kg; 0,05 kg
Linearisation in dots	3
Reproducibility	0,02 kg; 0,05 kg
Tare range	-150 kg
Default unit	kg
Units	kg
Units (if device is conformity assessed)	kg
Minimum weight [Min]	0,4 kg; 1 kg
Adjustment options	Adjusting with external weight
Recommended adjusting weight	150 kg (M1)
Stabilization time	2 s
Warm-up time	10 min; 10 min
Eccentric loading at 1/3 [Max]	0,02 kg; 0,05 kg
Loadcell type	aluminium IP65 silicone-coated
Load cell connection	4-wire

Approval	
CE mark	✓

KERN IOC 100K-2LM



Allround platform scale with a wide range of communication options, verification optional

Function for averaging under unstable weighing conditions	✓
Recipe/summing level	Sum A
Alibi memory	optional internal memory
Alibi memory - number of memory spaces	250.000
Interfaces	RS-232 standard
	Ethernet (optional, factory)
	USB (optional, factory)
	WiFi (optional, factory)
	Alibi memory (optional, factory)
	USB-Host/Master (optional, factory)
	Verification plug (optional, factory)
	Bluetooth BLE (v4.0) (optional, factory)
IP protection - complete device	IP65
IP protection - display	IP65
IP protection - load cell	IP65
IP protection - platform	IP65

Counting	
Smallest piece weight when piece counting - laboratory conditions	5 g
Smallest piece weight when piece counting - normal conditions	50 g
Reference quantity	10, 20, 50, 100, 200
Counting resolution (laboratory conditions)	30.000

Power Supply	
Input voltage power supply / power [Max]	100 V - 240 V AC 50/60 Hz 0.4 A max
Input voltage device / power [Max]	12 V DC, 1000 mA
Plug-in power supply type	Power adapter
Supplied power supply	Power supply unit
Plug-in power supply / adapter for countries - included with the delivery	EURO
	UK
	US
	CH
Plug-in power supply / adapter for countries - optional	EURO
	AUS
	UK US
Rechargeable battery optional	Rchrg. battery optional - intern
Rechargeable battery charging time	3 h

Rechargeable battery operating time - backlight on	26 h
Rechargeable battery operating time - backlight off	43 h
Battery / accumulator type	Pb
Battery operating time	100 h

Environmental conditions	
Humidity of environment [Min]	0 %
Humidity of environment [Max]	80 %
Ambient temperature [Min]	-10 °C
Ambient temperature [Max]	40 °C

Packing & Shipping	
Readability force [d] (N)	1 d
Dimensions packaging (WxDxH)	1090x660x170 mm
Net weight	21,9 kg
Shipping method	Parcel service
Net weight approx.	22 kg
Gross weight approx.	26 kg
Shipping weight	24,72 kg

Services (optional)	
Article number for adjustment at the location of installation	961-249
Article number for conformity assessment	965-229
Article number for DAkKS calibration	963-129
Article number for certificate of conformity (verification)	969-517


KERN IOC 100K-2LM



Allround platform scale with a wide range of communication options, verification optional

Pictograms

STANDARD

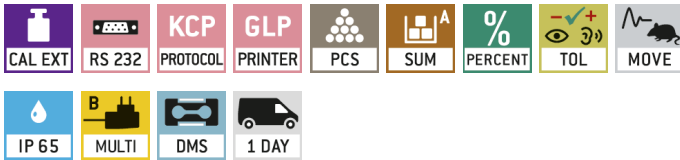

OPTION



FACTORY

