


# KERN DLB 160-3A110V

# KERN

Moisture analyser with intuitive graphic display and step-by-step user guidance in 6 languages

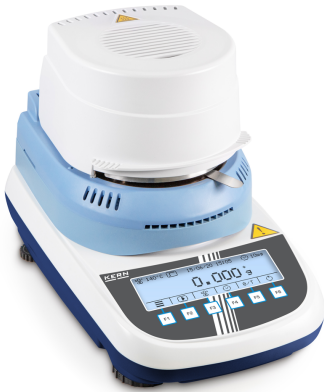

Temperature calibration points	80 °C; 150 °C
Stabilization time	4 s
Warm-up time	120 min
Eccentric loading at 1/3 [Max]	0,005 g
Maximum creep (15 minutes)	10 mg
Maximum creep (30 minutes)	20 mg
Readability moisture [d] (%)	0,01%

## Approval

CE mark	✓
---------	---

## Display

Display type	LCD graphic
Display type	LCD Graphic
Display screen size	132×38 mm
Display backlight	✓
Display digit height - smallest digit	4 mm
Display digit height	11 mm

Languages of the user interface	German English French Spanish Italian Portuguese
---------------------------------	---

## Construction

Dimension housing (W×D×H)	215×345×235 mm
Material display housing	Plastics
Material housing	plastic
Dimensions weighing surface (Ø)	100 mm
Levelling feet adjustable	✓
Heat generation capacity (W)	400

## Functions

Number of keys for operation	6
Tare function	automatic & manual (multi)
Standby function	✓
Interfaces	RS-232 standard
Drying modes	Standard drying Rapid drying
Switch-off criteria	time controlled automatic manual

## Power Supply

Input voltage power supply / power [Max]	100 - 120 V AC; 50/60 Hz
--	--------------------------

## Category

Brand	KERN
Product category	Laboratory balance
Product group	Moisture analyser
Product family	DLB

## Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	160 g
Temperature [Min] (°C)	35 °C
Temperature [Max] (°C)	160 °C
Readability [d]	0,001 g
Resolution	160.000
Linearity	± 0,003 g
Reproducibility	0,001 g
Reproducibility weight of sample 2 g	0,15%
Reproducibility weight of sample 10 g	0,05%
Default unit	g
Units	g mg % rH % Dry mass
Minimum weight [Min]	0,5 g
USP Minimum weight of sample (k = 2, U = 0.1%)	2 g
Temperature increment	1 °C
Adjustment options	Adjusting with external weight
Recommended adjusting weight	100 g (E2)
Possible calibration points	100 g

# KERN DLB 160-3A110V

**KERN**

Moisture analyser with intuitive graphic display and step-by-step user guidance in 6 languages

Input voltage device / power [Max]	110 V; 50/60 Hz
Plug-in power supply type	Built-in power supply
Supplied power supply	Power supply unit
Plug-in power supply / adapter for countries - optional	US

## Environmental conditions

Humidity of environment [Min]	45 %
Humidity of environment [Max]	75 %
Ambient temperature [Min]	5 °C
Ambient temperature [Max]	35 °C

## Packing & Shipping

Readability force [d] (N)	1 d
Dimensions packaging (W×D×H)	280×450×400 mm
Net weight	4,7 kg
Shipping method	Parcel service
Net weight approx.	4,8 kg
Gross weight approx.	7 kg
Shipping weight	10,1 kg

## Services (optional)

Article number for DAkkS calibration	963-127
Article number for factory calibration (temperature)	964-305
Article number for certificate of conformity (verification)	969-517

## Pictograms

### STANDARD



### OPTION

