



HANGING SCALES, CRANE SCALES


PROFESSIONAL MEASURING





KERN Pictograms


 **Internal adjusting**
Quick setting up of the balance's accuracy with internal adjusting weight (motordriven)


 **Adjusting program CAL**
For quick setting up of the balance's accuracy. External adjusting weight required


 **EasyTouch**
Suitable for the connection, data transmission and control through PC or tablet


 **Memory**
Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.


 **Alibi memory**
Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard.


 **KERN Universal Port (KUP)**
allows the connection of external KUP interface adapters, e.g. RS-232, RS-485, SB, Bluetooth, WIFI, Analogue, Ethernet etc. for the exchange of data and control commands, without installation effort


 **RS-232 Data interface**
To connect the balance to a printer, PC or network


 **RS-485 Data interface**
To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible


 **USB Data interface**
To connect the balance to a printer, PC or other peripherals

 **Bluetooth* Data interface**
To transfer data from the balance to a printer, PC or other peripherals

 **WIFI Data interface**
To transfer data from the balance to a printer, PC or other peripherals


 **Control outputs**
(optocoupler, digital I/O)
To connect relays, signal lamps, valves, etc.


 **Analogue interface**
to connect a suitable peripheral device for analogue processing of the measurements


 **Interface for second balance**
For direct connection of a second balance


 **Network interface**
For connecting the scale to an Ethernet network


 **KERN Communication Protocol (KCP)**
It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems


 **GLP/ISO log intern**
The balance displays weight, date and time, independent of a printer connection


 **GLP/ISO log Printer**
With weight, date and time. Only with KERN printers.


 **Piece counting**
Reference quantities selectable. Display can be switched from piece to weight


 **Recipe level A**
The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out


 **Recipe level B**
Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display


 **Totalising level A**
The weights of similar items can be added together and the total can be printed out


 **Percentage determination**
Determining the deviation in % from the target value (100 %)


 **Weighing units**
Can be switched to e.g. nonmetric units. See balance model. Please refer to KERN's website for more details

 **Weighing with tolerance range (Checkweighing)**
Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model

 **Hold function**
(Animal weighing program)
When the weighing conditions are unstable, a stable weight is calculated as an average value


 **Protection against dust and water splashes IPxx**
The type of protection is shown in the pictogram


 **Suspended weighing**
Load support with hook on the underside of the balance


 **Battery operation**
Ready for battery operation. The battery type is specified for each device


 **Rechargeable battery pack**
Rechargeable set


 **Universal plug-in power supply**
with universal input and optional input socket adapters for
A) EU, CH, GB
B) EU, CH, GB, US
C) EU, CH, GB, US, AUS


 **Plug-in power supply**
230V/50Hz in standard version for EU, CH. On request GB, USA or AUS version available


 **Integrated power supply unit**
Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request


 **Weighing principle Strain gauges**
Electrical resistor on an elastic deforming body


 **Weighing principle Tuning fork**
A resonating body is electromagnetically excited, causing it to oscillate


 **Weighing principle Electromagnetic force compensation**
Coil inside a permanent magnet. For the most accurate weighings


 **Weighing principle Single cell technology**
Advanced version of the force compensation principle with the highest level of precision

 **Conformity Assessment**
The time required for conformity assessment is specified in the pictogram

 **DAkkS calibration possible (DKD)**
The time required for DAkkS calibration is shown in days in the pictogram

 **Factory calibration (ISO)**
The time required for Factory calibration is shown in days in the pictogram

 **Package shipment**
The time required for internal shipping preparations is shown in days in the pictogram

 **Pallet shipment**
The time required for internal shipping preparations is shown in days in the pictogram

KERN Models A-Z

440	30
572	34
A	
ABP	50-51
ABP-A	52
ABT-NM	48
ACS/ACJ	46-47
ADB/ADJ	43
ALS-A/ALJ-A	44-45
B	
BFB	124-125
BFN	126
BIC	121
BID	122-123
C	
CB Q1 · CB Q2 · CB P1	160
CCA	94-95
CCS	96-97
CDS	93
CE Hx	138
CFS	90
CH	169
CIB	87
CJ P · CJ X	163
CKE	91
CM	10
CO Y1 · CO Y2 · CO Y5	162
CP P4 · CP Y4 · CP P1 · CP Y1 · CP P3	157
CP P2 · CP P8 · CP P7 · CP P9	158
CR Q1 · CR P1 · CR Y1	159
CT Q1 · CT P1 · CT P2	161
CPB	89
CXB/CXB-NM	88
D	
DAB	54
DBS	55
DE	106-107
DLB	56
DS	115
E	
ECB-N/ECE-N	59
EFS	13
EG-N/EW-N	37
EHA	17
EMB	14
EMB-V	15
EMS	16
EOB	104
EOC	108-109
EOE	103
EOS	105
EWJ	31

F	
FCB	61
FCE-N	60
FCF	69
FES/FEJ	41
FFN	74
FGE	68
FKB	62-63
FOB-LM	70
FOB-S · FOB-NS	71
FOB · FOB-NL	72
FXN · FXN-M	75
G	
GAB-N	64
H	
HCB	171
HCD	173
HCN	172
HDB-N · HDB-XL	170
HFA	174
HFC	175
HFD	176-177
HFM	180
I	
IFB	114
IFC NEW	112-113
IFS	92
IOC	110-111
IXC NEW	116-117
K	
KBP-V20 IP65 NEW	152
KDP	139
KFA-V20	154
KFB-TM	148
KFC-TM	150
KFD-V20	153
KFD-V40 IP68	155
KFN-TM	149
KFP-V20 IP65	152
KFP-V20 IP67	153
KFP-V30	154
KFP-V40 IP68 NEW	155
KFS-TM	148
KFU-V20	154
KFU-V30	154
KGP	136
KIB-TM	149
KIP-V20M	153
KXC-TM	151
KXP-V20 IP65	152

N	
NFB	133
NIB	132
NFN	134
P	
PBJ/PBS	39
PCB	28-29
PCD	26
PCJ NEW	32-33
PEJ/PES	40
PFB	27
PLJ/PLS	35
PNS/PNJ	36
PWS	38
R	
RIB	80
RPB	81
S	
SCD-4.0	186
SCD-4.0-PRO	187
SFB/SFB-H	78
SFE	118
SXC NEW	76-77
T	
TGC	11
TGD	11
U	
UFA	127
UFB	130
UFN	131
UIB	128
UID	129
V	
VHB	165
W	
WTB	73
Y	
YKV	137
YRO-01/-02/-03	192



KERN Quick-Finder

How I quickly find the product I am looking for

Ahead of each product group allows you to base the search for a certain target group on weighing data you need such as readout, weighing capacity and main features for each model.

And it's as simple as that – find the product you want in 2 steps:

1. Go to the product group index on page 3
2. Pick the appropriate product group and find the product you want using the Quick-Finder



The classic among manual hanging scales – perfect for rapid weighing of higher loads

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/Breakage resistance) and EN 61010-1 (Electrical safety)
- Ideal for rapid control in goods-in and goods-out
- Also essential in the private sector to determine the weight of fish, game, fruits, bicycle parts, suitcases etc.
- Hold function: For easy reading of the weighing result, the display can be „frozen“ in different ways. Either automatically when the weighing value remains unchanged or manually by pressing the Hold key
- Peak load display (peak hold)
- Hook made of steel

Technical data

- LCD display, digit height 11 mm
- **2** Tape measure, extractable, length approx. 100 cm
- Ready for use: Batteries included, 9 V block, operating time up to 20 h
- Weighing units: kg, lb, N
- Overall dimensions W×D×H 90×30×283 mm
- Net weight approx. 0,35 kg
- Permissible ambient temperature 5 °C/35 °C

Accessories

- **3** Tare pan with pan beam, Max. load 30 kg, details see *Accessories*, KERN CH-A01N, € 88,-


STANDARD



OPTION



Model	Weighing capacity	Readability	Price excl. of VAT ex works €	Options	
				DAkkS KERN	Calibr. Certificate DAkkS KERN
KERN	[Max] kg	[d] g			€
CH 15K20	15	20	75,-	963-128H	118,-
CH 50K50	50	50	80,-	963-128H	118,-
CH 50K100	50	100	70,-	963-128H	118,-



KERN HDB

KERN HDB-XL

User-friendly hanging scale for rapid, mobile weighing

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/Breakage resistance) and EN 61010-1 (Electrical safety)
- HDB-XL: High-capacity XL-version. The larger design creates space for a large handle, which enables even better handling especially with heavier loads
- Ideal for rapid control in goods-in and goods-out
- Also essential in the private sector to determine the weight of fish, game, fruits, bicycle parts, suitcases etc.
- Hold function: For easy reading of the weighing result, the display can be „frozen“ in different ways. Either automatically when the weighing value remains unchanged or manually by pressing the Hold key
- Hook, steel, included with the delivery. Can be hinged on HDB-N models
- Peak load display (peak hold)

Technical data

- LCD display, digit height 12 mm
- Ready for use: Batteries included, 2×1.5 V AAA, operating time up to 180 h
- Weighing units: kg, lb, N
- Permissible ambient temperature 5 °C/35 °C

Accessories

- **2** Tare pan with pan beam, Max. load 30 kg, details see *Accessories*, KERN CH-A01N, € 88,-

15




STANDARD



OPTION



Model	Weighing capacity	Readability	Dimensions	Net weight	Price excl. of VAT ex works €	Options	
						DAkkS	DAkkS Calibr. Certificate KERN €
KERN	[Max] kg	[d] g	W×D×H mm	approx. kg			
HDB 5K5N	5	5	72×25×188	0,20	65,-	963-127H	98,-
HDB 10K10N	10	10	72×25×188	0,20	65,-	963-128H	118,-
High-capacity XL-version							
HDB 6K-3XL	6	5	101×25×203	0,25	85,-	963-128H	118,-
HDB 10K-2XL	15	10	101×25×203	0,25	85,-	963-128H	118,-
HDB 30K-2XL	30	20	101×25×211	0,25	85,-	963-128H	118,-

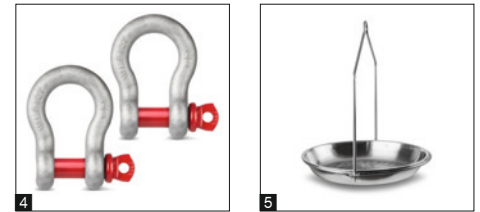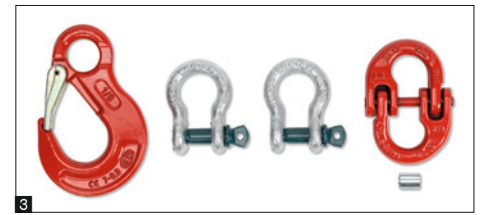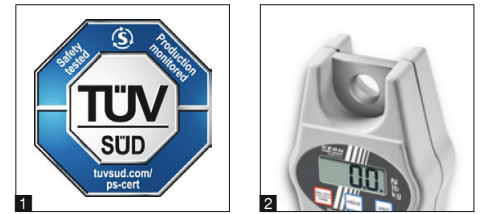

Handy hanging scale for higher loads

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/Breakage resistance) and EN 61010-1 (Electrical safety)
- Ideal for rapid control in goods-in and goods-out
- Also essential in the private sector to determine the weight of fish, game, fruits, bicycle parts, suitcases etc.
- Hold function: For easy reading of the weighing result, the display can be „frozen“ in different ways. Either automatically when the weighing value remains unchanged or manually by pressing the Hold key
- Peak load display (peak hold), Measuring frequency 5 Hz
- [Max] ≤ 200 kg: Snap link (stainless steel) with safety catch and hook (stainless steel) as standard, see larger picture

- **2** [Max] ≥ 500 kg: Reinforced version for heavy loads. Snap link and hook not included, see *Accessories*

Technical data

- LCD display, digit height 12 mm
- Hole diameter of load support, model with [Max] ≤ 200 kg: approx. 14 mm [Max] ≥ 500 kg: approx. 16 mm
- Weighing units: kg, lb, N
- Ready for use: Batteries included, 3×1.5 V AA, operating time up to 300 h
- Permissible ambient temperature 5 °C/35 °C

Accessories

Suitable for all models

- **3** Hook with safety catch, galvanised and laquered cast steel, not rotatable, scope of delivery: 2 shackles, 1 connecting link, 1 hook, KERN YHA-06, € 140,-
- **4** High-strength shackle, hot-dipped galvanised cast steel bracket, curved edge. Scope of delivery: 2 shackles, KERN YSC-04, € 60,-

Suitable for all models with [Max] ≤ 200 kg

- Snap link (stainless steel) with safety catch, opening approx. 13 mm, KERN HCB-A01, € 35,-
- Hook (stainless steel), opening approx. 29 mm, KERN HCB-A02, € 35,-

Suitable for model HCB 20K10

- **5** Tare pan with pan beam, Max. load 30 kg, details see *Accessories*, KERN CH-A01N, € 88,-

STANDARD



OPTION



Model	Weighing capacity	Readability	Dimensions housing W×D×H mm	Net weight approx. kg	Price excl. of VAT ex works €	Options	
						DAKKS KERN	Calibr. Certificate €
KERN HCB 20K10	[Max] 20 kg	[d] 10 g	82×43×153	0,30	120,-	963-128H	118,-
HCB 50K20	50	20	82×43×153	0,30	130,-	963-128H	118,-
HCB 50K100	50	100	82×43×153	0,30	100,-	963-128H	118,-
HCB 99K50	99	50	82×43×153	0,30	110,-	963-129H	138,-
HCB 100K200	100	200	82×43×153	0,30	110,-	963-129H	138,-
HCB 200K100	200	100	82×43×153	0,30	130,-	963-129H	138,-
HCB 200K500	200	500	82×43×153	0,30	105,-	963-129H	138,-
HCB 0.5T-3	500	1000	82×43×153	0,40	215,-	963-130H	245,-
HCB 1T-3	1000	2000	82×48×153	0,60	280,-	963-130H	245,-



Robust, compact hanging scale with high level of protection against dust and water spray

Features


- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/Breakage resistance) and EN 61010-1 (Electrical safety)
- **2** Housing stainless steel, IP65-protected against dust and water splashes
- Ideal for rapid control in goods-in and goods-out
- Also essential in the private sector to determine the weight of fish, game, fruits, bicycle parts, suitcases etc.
- Hold function: For easy reading of the weighing result, the display can be „frozen“ in different ways. Either automatically when the weighing value remains unchanged or manually by pressing the Hold key
- Peak load display (peak hold)
- Internal measuring frequency: 5 Hz
- Snap link (stainless steel) with safety catch as standard
- Hook (stainless steel) as standard

Technical data


- LCD display, digit height 12 mm
- **3** Second display on the back of the balance
- Hole diameter of load support ca. 14 mm
- Ready for use: Batteries included, 2×1.5 V AA, operating time up to 200 h
- Weighing units: kg, lb, N
- Overall dimensions W×D×H 96×48×179 mm
- Net weight approx. 0,50 kg
- Permissible ambient temperature 5 °C/35 °C

Accessories

- Snap link (stainless steel) with safety catch, opening approx. 13 mm, KERN HCB-A01, € 35,-
- Hook (stainless steel), opening approx. 29 mm, KERN HCB-A02, € 35,-



Model	Weighing capacity	Readability	Price excl. of VAT ex works €	Options	
				DAkkS Calibr.	Certificate DAkkS KERN €
KERN	[Max] kg	[d] g			
HCN 50K100IP	50	100	145,-	963-128H	118,-
HCN 100K200IP	100	200	145,-	963-129H	138,-
HCN 200K500IP	200	500	145,-	963-129H	138,-

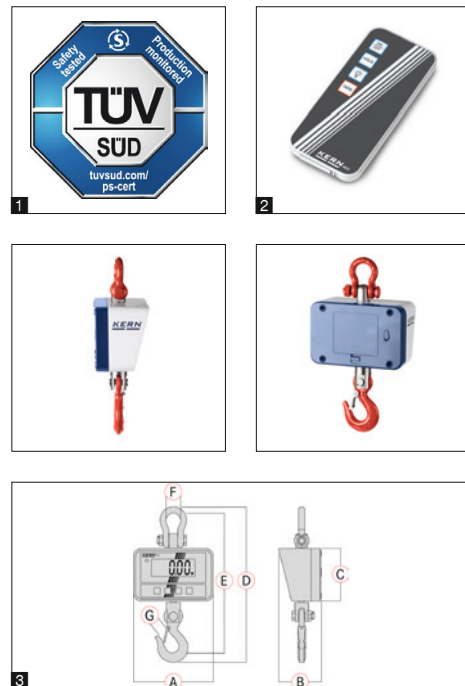

High-resolution crane scale for loads up to 300 kg

Features

- With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/Breakage resistance) and EN 61010-1 (Electrical safety)
- Fully-equipped crane scale for low to medium load ranges. The solid design guarantees that extra level of safety (TÜV tested). Thanks to the large LCD display and the remote control which is delivered as standard, it can also be operated safely from a distance and results can be read off
- High mobility: Thanks to battery operation/rechargeable battery operation (optional), compact, lightweight construction, it is suitable for the use in several locations (production, warehouse, dispatch department, etc.)
- Battery level indicator, LED visual display
- Hold function: For easy reading of the weighing result, the display can be „frozen“ in different ways. Either automatically when the weighing value remains unchanged or manually by pressing the Hold key

- Tare: Resets the display to „0“ when there is a load on the scale. Now removed or added loads are directly displayed
- Large high-contrasted display that is easy to read
- Standby function: display automatically switched off after 5 min without a change of load. Automatic activation with the touch of a key
- Hook with safety catch, revolving
- Shackle and safety catch made of nickel-plated steel
- Infrared remote control standard, range up to 20 m, W×D×H 65×24×100 mm, batteries included

Technical data


- Backlit LCD display, digit height 28 mm
- Ready for use: Batteries standard, 4×1.5 V AA, operating time approx. 100 h
- Precision: 0,2 % of [Max]
- Weighing units: kg, lb, N
- Permissible ambient temperature 5 °C/40 °C

Accessories

- Internal rechargeable battery pack for load receptor, operating time up to 50 h without backlight, charging time approx. 12 h. Weighing is not possible during the charging process, KERN HCD-A01, € 50,-



Model	Weighing capacity [Max] kg	Readability [d] g	Net weight approx. kg	3 Dimensions							Price excl. of VAT ex works €	Options	
				A mm	B mm	C mm	D mm	E mm	F mm	G mm		DAkKS Calibr. KERN	Certificate DAKKS €
HCD 60K-2	60	20	1,2	150	79,3	97,7	276,1	246,5	26	18	210,-	963-129H	138,-
HCD 100K-2	150	50	1,2	150	79,3	97,7	276,1	246,5	26	18	210,-	963-129H	138,-
HCD 300K-1	300	100	1,2	150	79,3	97,7	276,1	246,5	26	18	210,-	963-129H	138,-
Multi-division balance, with increasing or decreasing load, it switches automatically to the next largest or smallest weighing range [Max] and readout [d].													
HCD 100K-2D	60 150	20 50	1,2	150	79,3	97,7	276,1	246,5	26	18	220,-	963-129H	138,-
HCD 300K-2D	150 300	50 100	1,2	150	79,3	97,7	276,1	246,5	26	18	220,-	963-129H	138,-

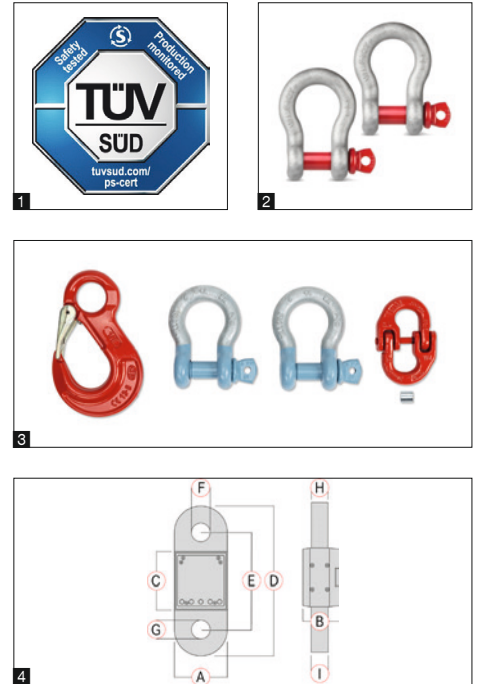

Compact crane scale with integrated display can also be used for tensile force measurement

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/Breakage resistance) and EN 61010-1 (Electrical safety)
- With its high-quality finish, low weight and compact dimensions, this crane scale (tensile force gauge) is an essential device for industrial use, on building sites, in freight centres, ports etc.
- Because of its compact design it is also ideally suited for installation in systems where space is limited, etc.
- Ideally suited for determining weight quickly while loading and unloading
- Peak load display (peak hold)
- Hold function: For easy reading of the weighing result, the display can be „frozen“ by pressing the Hold key
- Tare: Resets the display to „0“ when there is a load on the scale. Now removed or added loads are directly displayed

Technical data

- Large backlit LCD display, digit height 23 mm
- Material and design of housing/load support, models with [Max] ≤ 3 t: aluminium/stainless steel bushing [Max] > 3 t: steel/steel
- Rechargeable battery pack integrated, as standard, operating time up to 30 h without backlight, charging time approx. 12 h
- Optional battery operation, 3×1.5 V AA not included in scope of delivery, operating time up to 30 h
- Precision: 0,2 % of [Max]
- Internal measuring frequency: 60 Hz
- Weighing units: kg, lb, N
- Permissible ambient temperature 5 °C/35 °C

Accessories

- **2** High-strength shackle, hot-dipped galvanised cast steel bracket, bow shaped. Scope of delivery: 2 shackles with lacquered screw bolts, suitable for models with [Max] ≤ 5 t: KERN YSC-01, **€ 125,-** [Max] = 10 t: KERN YSC-02, **€ 270,-**
- **3** Hook with safety catch, galvanised and lacquered cast steel, not rotatable, scope of delivery: 2 shackles, 1 connecting link, 1 hook [Max] ≤ 1 t: KERN YHA-01, **€ 210,-** [Max] = 3 t: KERN YHA-02, **€ 230,-** [Max] = 5 t: KERN YHA-03, **€ 300,-** [Max] = 10 t: KERN YHA-04, **€ 560,-**


STANDARD

CAL EXT UNIT TOL BATT ACCU MULTI DMS 1 DAY

OPTION

DAkkS +3 DAYS

Model	Weighing capacity	Readability	Net weight	4 Dimensions										Price excl. of VAT ex works €	Options	
				approx. kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm		DAkkS Calibr. Certificate	Certificate
KERN	[d] kg	[d] g	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	DAkkS KERN	€
HFA 600K-1	600	200	1,8	90	62	100	255	165	32	32	30	30	30	30	963-130H	245,-
HFA 1T-4	1000	500	1,8	90	62	100	255	165	32	32	30	30	30	963-130H	245,-	
HFA 3T-3	3000	1000	2,0	90	62	100	255	165	32	32	30	30	30	963-132H	620,-	
HFA 5T-3	5000	2000	4,0	90	62	100	255	165	30	30	30	30	30	963-132H	620,-	
HFA 10T-3	10000	5000	6	90	72	100	275	185	40	40	40	40	40	963-133H	870,-	

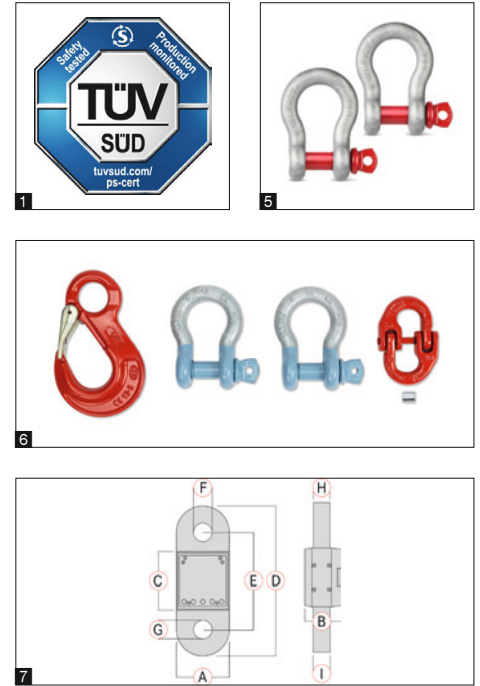

Compact crane scale for use in harsh environmental conditions or where space is limited, with convenient hand-held terminal

Features

- 1 With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/Breakage resistance) and EN 61010-1 (Electrical safety)
- With its high-quality finish, low weight and compact dimensions, this crane scale (tensile force gauge) is an essential device for industrial use, on building sites, in freight centres, ports etc.
- Because of its compact design it is also ideally suited for installation in systems where space is limited, etc.
- Peak load display (peak hold)
- Hold function: For easy reading of the weighing result, the display can be „frozen“ by pressing the Hold key
- Tare: Resets the display to „0“ when there is a load on the scale. Now removed or added loads are directly displayed
- Display device with integrated radio module, which the user can carry around with him, thanks to the convenient hand strap, standard. In this way the weighing data can always be read off the

display device by the user, even when the user is a long way from the load receptor (force gauge) or under poor lighting conditions. Range up to 20 m. All functions can be selected

Technical data

- Material and design of housing/load support, models with [Max] ≤ 3 t: aluminium/stainless steel bushing [Max] > 3 t: steel/steel
- Precision: 0,2 % of [Max]
- Internal measuring frequency: 10 Hz
- Weighing units: kg, lb, N
- Permissible ambient temperature 5 °C/35 °C

Display device

- Large backlit LCD display, digit height 23 mm
- 2 Rechargeable battery pack integrated, as standard, operating time up to 30 h without backlight, charging time approx. 12 h
- Dimensions of display device W×D×H 88×64×256 mm

Load receptor

- 3 Internal rechargeable battery pack included with the delivery, Operating time up to 35 h without backlight, charging time approx. 8 h
- 4 Optional battery operation, 3×1.5 V AA not included in scope of delivery, operating time up to 40 h

Accessories

- 5 High-strength shackle, hot-dipped galvanised cast steel bracket, bow shaped. Scope of delivery: 2 shackles with lacquered screw bolts, suitable for models with [Max] ≤ 5 t: KERN YSC-01, € 125,- [Max] = 10 t: KERN YSC-02, € 270,-
- 6 Hook with safety catch, galvanised and lacquered cast steel, not rotatable, scope of delivery: 2 shackles, 1 connecting link, 1 hook [Max] ≤ 1 t: KERN YHA-01, € 210,- [Max] = 3 t: KERN YHA-02, € 230,- [Max] = 5 t: KERN YHA-03, € 300,- [Max] = 10 t: KERN YHA-04, € 560,-

STANDARD



OPTION



Model	Weighing capacity	Readability	Net weight	7 Dimensions									Price excl. of VAT ex works €	Options	
				approx. kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm		I mm	DAKKS Calibr. Certificate
HFC 600K-1	600	200	1,8	90	62	100	255	165	32	32	30	30	1070,-	963-130H	245,-
HFC 1T-4	1000	500	1,8	90	62	100	255	165	32	32	30	30	1070,-	963-130H	245,-
HFC 3T-3	3000	1000	2,2	90	62	100	255	165	32	32	30	30	1140,-	963-132H	620,-
HFC 5T-3	5000	2000	4,0	90	62	100	255	165	30	30	30	30	1220,-	963-132H	620,-
HFC 10T-3	10000	5000	6	90	72	100	275	185	40	40	40	40	1690,-	963-133H	870,-



KERN HFD/HFD-IP



KERN HFD-M

**Robust, high-resolution crane scale up to 12 t,
also with optional verification or protection type IP67**




High mobility: thanks to rechargeable battery operation, compact, lightweight construction, it is suitable for the use in several locations (production, warehouse, dispatch department, etc.)



Solid shackles, non-revolving



Radio remote control standard. Range up to 20 m. All functions can be selected (excl. ON/OFF). W×D×H 65×24×100 mm. Batteries included, 1×12V, 23A

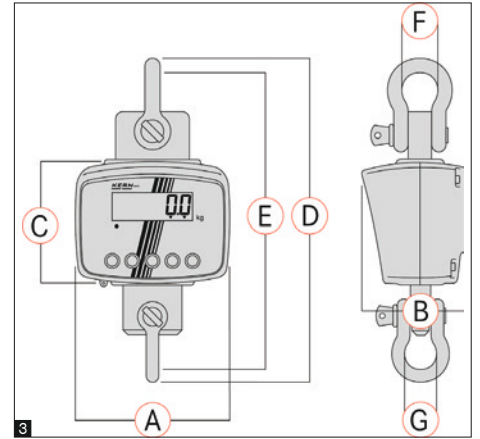

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/Breakage resistance) and EN 61010-1 (Electrical safety)
- Because of its stable construction and robust design, it is ideal for continuous use in industrial environment
- Tare: Resets the display to „0“ when there is a load on the scale. Now removed or added loads are directly displayed

KERN HFD/HFD-IP

- Hold function: the weight display is „frozen“ when the Hold button is pressed

KERN HFD-IP

- The models with IP add-on have special spray and dust protection to IP67 and because of this they are ideal for use in harsh environments

KERN HFD-M

- The models with M add-on can be verified optionally and because of this they are ideal for use in verified applications such as, for example, calculation of a total price, based on weight
- Will support you when weighing freight in a SOLAS compliant manner
- Sleep function: when the sleep button is pressed, the weight display is switched off, but the value remains stored. This can extend the battery life

Technical data

- Superior display size: digit height 30 mm, bright backlight for easy reading of weighing results, even in poor lighting conditions
- Rechargeable battery pack integrated, as standard, operating time up to 70 h without backlight, charging time approx. 12 h. Battery pack accessible from the outside, which means it is easy to replace
- Precision: 0,2 % of [Max]
- Weighing units: kg
- Permissible ambient temperature -10 °C/40 °C

Accessories

- Charging station for external battery charging, scope of delivery: charging station, exchangeable battery, mains adapter, KERN HFD-A07, € 120,-
- **2** Hook with safety catch, cast steel, galvanised and lacquered, non-revolving, suitable for models [Max] ≤ 1t: KERN HFD-A01, € 50,- [Max] = 3t: KERN HFD-A02, € 70,- [Max] ≥ 6t: KERN HFD-A03, € 130,-
- Bluetooth data interface for wireless data transfer to PC or tablets, must be ordered at purchase, KERN HFD-A06, € 255,-

STANDARD: CAL EXT, SUM, IP 67, ACCU, MULTI, DMS, 1 DAY
 HFD/HFD-IP: HFD-IP
 OPTION: DAKKS +3 DAYS
 FACTORY: BT 4.0, M +3 DAYS


Model	Weighing capacity [Max] kg	Readability [d] g	Net weight ca. kg	3 Dimensions						Price excl. of VAT ex works €	Verification KERN	Options		
				A mm	B mm	C mm	D mm	E mm	F = G mm			DAkkS €	Calibr. KERN	Certificate DAKKS €

Multi-range balance, with increasing load it switches automatically to the next largest weighing range [Max] and readout [d] and when the load is fully removed, the balance switches back to the lower range

HFD 600K-1	150 300 600	50 100 200	9	194	129	160	422	384	50,8	480,-	-	-	963-130H	245,-
HFD 1T-4	300 600 1500	100 200 500	9	194	129	160	422	384	50,8	490,-	-	-	963-130H	245,-
HFD 3T-3	600 1500 3000	200 500 1000	10	194	129	160	457	413	58	670,-	-	-	963-132H	620,-
HFD 6T-3	1500 3000 6000	500 1000 2000	15	194	129	160	518	467	68,3	850,-	-	-	963-132H	620,-
HFD 10T-3	3000 6000 12000	1000 2000 5000	22	194	129	160	584	521	82,5	990,-	-	-	963-133H	870,-
Protection against dust and water splashes IP67														
HFD 600K-1IP	150 300 600	50 100 200	9	194	129	160	422	384	50,8	590,-	-	-	963-130H	245,-
HFD 1T-4IP	300 600 1500	100 200 500	9	194	129	160	422	384	50,8	590,-	-	-	963-130H	245,-
HFD 3T-3IP	600 1500 3000	200 500 1000	10	194	129	160	457	413	58	740,-	-	-	963-132H	620,-
HFD 6T-3IP	1500 3000 6000	500 1000 2000	15	194	129	160	518	467	68,3	920,-	-	-	963-132H	620,-
HFD 10T-3IP	3000 6000 12000	1000 2000 5000	22	194	129	160	584	521	82,5	1060,-	-	-	963-133H	870,-

Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order. The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.

HFD 600K-1M	600	200	9	194	129	160	422	384	50,8	660,-	965-130H	150,-	963-130H	245,-
HFD 1T-4M	1500	500	9	194	129	160	422	384	50,8	650,-	965-130H	150,-	963-130H	245,-
HFD 3T-3M	3000	1000	10	194	129	160	457	413	58	860,-	965-132H	235,-	963-132H	620,-
HFD 6T-3M	6000	2000	15	194	129	160	518	467	68,3	1050,-	965-132H	235,-	963-132H	620,-
HFD 10T-3M	12000	5000	20	194	129	160	584	521	82,5	1200,-	965-133H	355,-	963-133H	870,-

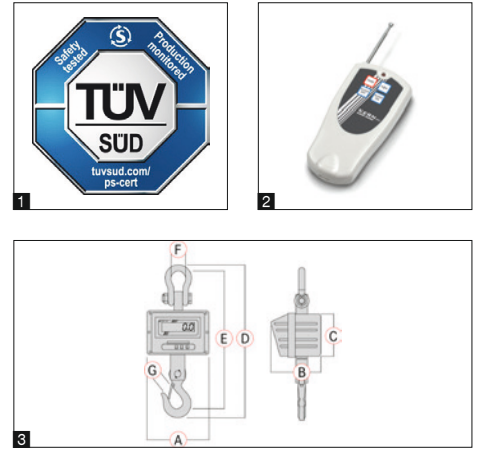

Robust industrial crane scale with bright LED display for optimum reading in unfavourable ambient conditions

Features

- With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/Breakage resistance) and EN 61010-1 (Electrical safety)
- Professional device for robust applications in production, quality control, logistics etc. Because of its stable construction and robust design, it is ideal for continuous use in industrial environment
- High mobility: thanks to rechargeable battery operation, compact, lightweight construction, it is suitable for the use in several locations (production, warehouse, dispatch department, etc.)
- Adaptation of the readout to unstable environmental conditions at the push of a button (you can select between 3 levels)
- Hold function: For easy reading of the weighing result, the display can be „frozen“ by pressing the Hold key

- Tare: Resets the display to „0“ when there is a load on the scale. Now removed or added loads are directly displayed
- Hook with safety catch, revolving
- Radio remote control standard. Range up to 20 m. All functions can be selected (excl. ON/OFF). W×D×H 48×10×95 mm. Batteries included, 12 V, Typ 23A

Technical data

- Superior display size: Digit height 30 mm, for easy reading of weighing results
- Internal rechargeable battery pack included with the delivery, operating time up to 50 h, charging time approx. 14 h
- Precision: 0,2 % of [Max]
- Weighing units: kg
- Permissible ambient temperature 0 °C/40 °C

STANDARD

CAL EXT ACCU MULTI DMS 1 DAY 2 DAYS

OPTION

DAkkS +3 DAYS

HFM 10T1

Model	Weighing capacity [Max] kg	Readability [d] g	Net weight ca. kg	③ Dimensions							Price excl. of VAT ex works €	Options	
				A mm	B mm	C mm	D mm	E mm	F mm	G mm		DAkkS Calibr. Certificate DAkkS KERN	Certificate €
HFM 1T0.1	1000	100	14	270	200	175	610	540	68	40	1010,-	963-130H	245,-
HFM 3T0.5	3000	500	16	270	200	175	610	540	74	40	1040,-	963-132H	620,-
HFM 5T0.5	5000	500	18	300	230	190	730	650	74	55	1400,-	963-132H	620,-
HFM 10T1	10000	1000	34	300	230	190	840	750	92	60	1860,-	963-133H	870,-

KERN & SOHN GmbH

Balances, Test Weights, Microscopes,
DAkkS Calibration Laboratory
Ziegelei 1
72336 Balingen
Germany
Tel. +49 7433 9933-0
info@kern-sohn.com
www.kern-sohn.com

**The oldest Precision Balance
Factory in Germany**



**Discover the multifaceted World of Balances, Microscopes and Measuring Technology
from KERN online: www.kern-sohn.com**



- Full KERN & SAUTER Product Range
- Convenient 24/7 Ordering
- Selection of more than 5,000 Items across Weighing and Measuring Technology, Optical Instruments as well as Accessories and Services
- Extensive Information and useful Download Options
- Technical Product Data Sheets
- Operating Instructions
- Descriptive Image and Video Material
- Useful KERN Services
- Technical Glossary
- KERN Dealer Portal
- Practical Filter and Search Functions



Follow us on our social media channels too



Printed in Germany by KERN & SOHN GmbH
z-cb-en-kr-20241

