



MOISTURE ANALYSERS


PROFESSIONAL MEASURING





KERN Pictograms


 **Internal adjusting**
Quick setting up of the balance's accuracy with internal adjusting weight (motordriven)


 **Adjusting program CAL**
For quick setting up of the balance's accuracy. External adjusting weight required


 **EasyTouch**
Suitable for the connection, data transmission and control through PC or tablet


 **Memory**
Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.


 **Alibi memory**
Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard.


 **KERN Universal Port (KUP)**
allows the connection of external KUP interface adapters, e.g. RS-232, RS-485, SB, Bluetooth, WIFI, Analogue, Ethernet etc. for the exchange of data and control commands, without installation effort


 **RS-232 Data interface**
To connect the balance to a printer, PC or network


 **RS-485 Data interface**
To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible


 **USB Data interface**
To connect the balance to a printer, PC or other peripherals

 **Bluetooth* Data interface**
To transfer data from the balance to a printer, PC or other peripherals

 **WIFI Data interface**
To transfer data from the balance to a printer, PC or other peripherals


 **Control outputs**
(optocoupler, digital I/O)
To connect relays, signal lamps, valves, etc.


 **Analogue interface**
to connect a suitable peripheral device for analogue processing of the measurements


 **Interface for second balance**
For direct connection of a second balance


 **Network interface**
For connecting the scale to an Ethernet network


 **KERN Communication Protocol (KCP)**
It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems


 **GLP/ISO log intern**
The balance displays weight, date and time, independent of a printer connection


 **GLP/ISO log Printer**
With weight, date and time. Only with KERN printers.


 **Piece counting**
Reference quantities selectable. Display can be switched from piece to weight


 **Recipe level A**
The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out


 **Recipe level B**
Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display


 **Totalising level A**
The weights of similar items can be added together and the total can be printed out


 **Percentage determination**
Determining the deviation in % from the target value (100 %)


 **Weighing units**
Can be switched to e.g. nonmetric units. See balance model. Please refer to KERN's website for more details


 **Weighing with tolerance range (Checkweighing)**
Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model


 **Hold function**
(Animal weighing program)
When the weighing conditions are unstable, a stable weight is calculated as an average value


 **Protection against dust and water splashes IPxx**
The type of protection is shown in the pictogram


 **Suspended weighing**
Load support with hook on the underside of the balance


 **Battery operation**
Ready for battery operation. The battery type is specified for each device


 **Rechargeable battery pack**
Rechargeable set


 **Universal plug-in power supply**
with universal input and optional input socket adapters for
A) EU, CH, GB
B) EU, CH, GB, US
C) EU, CH, GB, US, AUS


 **Plug-in power supply**
230V/50Hz in standard version for EU, CH. On request GB, USA or AUS version available


 **Integrated power supply unit**
Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request


 **Weighing principle Strain gauges**
Electrical resistor on an elastic deforming body


 **Weighing principle Tuning fork**
A resonating body is electromagnetically excited, causing it to oscillate


 **Weighing principle Electromagnetic force compensation**
Coil inside a permanent magnet. For the most accurate weighings


 **Weighing principle Single cell technology**
Advanced version of the force compensation principle with the highest level of precision

 **Conformity Assessment**
The time required for conformity assessment is specified in the pictogram

 **DAkkS calibration possible (DKD)**
The time required for DAkkS calibration is shown in days in the pictogram

 **Factory calibration (ISO)**
The time required for Factory calibration is shown in days in the pictogram

 **Package shipment**
The time required for internal shipping preparations is shown in days in the pictogram

 **Pallet shipment**
The time required for internal shipping preparations is shown in days in the pictogram

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by KERN & SOHN GmbH is under license. Other trademarks and trade names are those of their respective owners.

KERN Models A-Z

440	30
572	34
A	
ABP	50-51
ABP-A	52
ABT-NM	48
ACS/ACJ	46-47
ADB/ADJ	43
ALS-A/ALJ-A	44-45
B	
BFB	124-125
BFN	126
BIC	121
BID	122-123
C	
CB Q1 · CB Q2 · CB P1	160
CCA	94-95
CCS	96-97
CDS	93
CE Hx	138
CFS	90
CH	169
CIB	87
CJ P · CJ X	163
CKE	91
CM	10
CO Y1 · CO Y2 · CO Y5	162
CP P4 · CP Y4 · CP P1 · CP Y1 · CP P3	157
CP P2 · CP P8 · CP P7 · CP P9	158
CR Q1 · CR P1 · CR Y1	159
CT Q1 · CT P1 · CT P2	161
CPB	89
CXB/CXB-NM	88
D	
DAB	54
DBS	55
DE	106-107
DLB	56
DS	115
E	
ECB-N/ECE-N	59
EFS	13
EG-N/EW-N	37
EHA	17
EMB	14
EMB-V	15
EMS	16
EOB	104
EOC	108-109
EOE	103
EOS	105
EWJ	31

F	
FCB	61
FCE-N	60
FCF	69
FES/FEJ	41
FFN	74
FGE	68
FKB	62-63
FOB-LM	70
FOB-S · FOB-NS	71
FOB · FOB-NL	72
FXN · FXN-M	75
G	
GAB-N	64
H	
HCB	171
HCD	173
HCN	172
HDB-N · HDB-XL	170
HFA	174
HFC	175
HFD	176-177
HFM	180
I	
IFB	114
IFC NEW	112-113
IFS	92
IOC	110-111
IXC NEW	116-117
K	
KBP-V20 IP65 NEW	152
KDP	139
KFA-V20	154
KFB-TM	148
KFC-TM	150
KFD-V20	153
KFD-V40 IP68	155
KFN-TM	149
KFP-V20 IP65	152
KFP-V20 IP67	153
KFP-V30	154
KFP-V40 IP68 NEW	155
KFS-TM	148
KFU-V20	154
KFU-V30	154
KGP	136
KIB-TM	149
KIP-V20M	153
KXC-TM	151
KXP-V20 IP65	152

N	
NFB	133
NIB	132
NFN	134
P	
PBJ/PBS	39
PCB	28-29
PCD	26
PCJ NEW	32-33
PEJ/PES	40
PFB	27
PLJ/PLS	35
PNS/PNJ	36
PWS	38
R	
RIB	80
RPB	81
S	
SCD-4.0	186
SCD-4.0-PRO	187
SFB/SFB-H	78
SFE	118
SXC NEW	76-77
T	
TGC	11
TGD	11
U	
UFA	127
UFB	130
UFN	131
UIB	128
UID	129
V	
VHB	165
W	
WTB	73
Y	
YKV	137
YRO-01/-02/-03	192




KERN Quick-Finder

How I quickly find the product I am looking for

Ahead of each product group allows you to base the search for a certain target group on weighing data you need such as readout, weighing capacity and main features for each model.

And it's as simple as that – find the product you want in 2 steps:

1. Go to the product group index on page 3
2. Pick the appropriate product group and find the product you want using the Quick-Finder

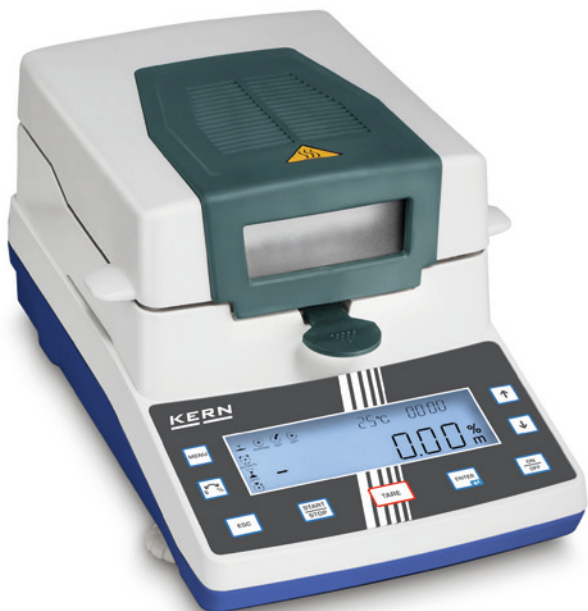

5

Particularly user-friendly moisture analyser with high-quality halogen quartz glass heater – also available as version with [d] = 10 mg, ideal for recurring rapid tests

Features



- KERN DAB 200-2: Version with lower resolution, whereby the switch-off criterion is reached faster, which saves time. Ideal for quick tests and spot checks
- Backlit graphic display, digit height 14 mm
- 1 Active drying process
- 2 Active heating profile
- 3 Active switch-off criteria
- 4 Previous drying time
- 5 Current temperature

- 6 Current moisture content in %
- 400 W halogen-quartz glass heater
- Suitable for temperature-insensitive samples
- Observation window above the sample, useful during initial setting
- Internal memory for automatic sequence of 15 complete drying processes and 5 drying processes carried out
- The last value measured remains on the display until it is replaced by a new measurement
- 50 sample plates included



KERN	DAB 100-3	DAB 200-2
Readability [d] Weight/Moisture (%)	0,001 g / 0,01%	0,01 g / 0,05%
Weighing capacity [Max]	110 g	200 g
Reproducibility weight of sample 2 g*	0,15%	1,5%
Reproducibility weight of sample 10 g*	0,03%	0,3%
Display after drying (Display can be switched over at any time)		
Moisture [%] = Moisture content (M) from wet weight (W)	0 - 100 %	
Dry content [%] = Dry weight (D) from W	100 - 0 %	
Moisture content (M)	Absolute value in [g]	
Temperature range (in steps up to)	40 °C - 199 °C (1 °C)	
Drying modes	<input type="checkbox"/> Standard drying <input checked="" type="checkbox"/> Gentle drying <input type="checkbox"/> Rapid drying	
Switch-off criteria	• Automatic switch-off (2 mg loss in weight in 45 s) • Time controlled switch-off (3 min - 99 min 59 s, 10 s increments) • Manual switch-off at the press of a button	
Recall of measurement/ Log output	Interval can be set from 1 s - 10 min (Only when used with printer or PC)	
Overall dimensions WxDxH	240x365x180 mm	
Net weight	4,82 kg	
Price excl. of VAT ex works €	1250,-	1200,-
Option DAKKS Calibr. Certificate Mass	KERN 963-127, € 98,-	
Option Factory Calibr. Certificate Temperature	KERN 964-305, € 174,-	

* application-dependent

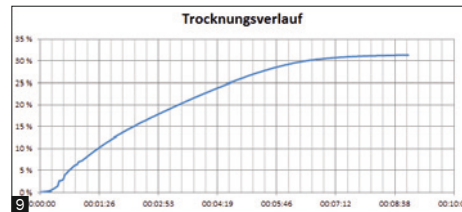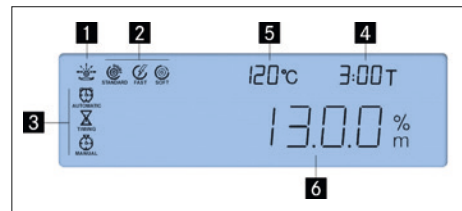

- Application handbook: In the download centre you will find a practical application handbook containing many examples, field reports, settings and tips for each KERN moisture analyser
- Note: both models are also available in infrared version, see accessories

Accessories

- Sample plates aluminium, ø 90 mm, unit of 80 pieces, KERN MLB-A01A, € 45,-
- Round fiberglass filter, medium mechanical stability, without organic binder, box of 100 pieces, KERN RH-A02, € 86,-
- Round fiberglass filter, medium mechanical stability, without organic binder, box of 100 pieces, KERN YMF-A01, € 45,-
- 7 Temperature calibration set consists of measuring sensor and display device, KERN DAB-A01., € 200,-
- 8 Infrared quartz glass heater, temperature range 40 °C-160 °C, Factory Option, KERN DAB-A02, € 198,-
- Display of the drying process in conjunction with BalanceConnection, Software BalanceConnection, for flexible recording or transmission of measured values, in particular also to Microsoft® Excel or Access as well as transfer of this data to other Apps and programs, for more details see internet, scope of supplies: 1 CD, 1 license, KERN SCD-4.0, € 210,-
- Thermal printer, KERN YKB-01N, € 380,-
- Matrix needle printer, to print the weights on normal paper, ideal for long-term archiving, KERN 911-013, € 480,-



Moisture analyser with high-quality single-cell weighing system for outstanding stability, reliability and response speed

Features

- Tip: Suitable for samples with low moisture content, e.g. plastics
- Backlit graphic display, digit height 15 mm
- 1 Active drying process
- 2 Previous drying time
- 3 Current temperature
- 4 Unit for displaying the results

- 5 Current moisture content in %
- 6 Active heating profile
- 400 W halogen-quartz glass heater
- Excellent temperature control thanks to halogen technology, suitable for temperature-sensitive samples
- Internal memory for automatic sequence of 10 complete drying processes and 100 drying processes carried out

STANDARD





OPTION



KERN	DBS 60-3
Readability [d] Weight/Moisture (%)	0,001 g / 0,01%
Weighing capacity [Max]	60 g
Reproducibility weight of sample 2 g*	0,15%
Reproducibility weight of sample 10 g*	0,02%
Display after drying	
Moisture [%] = Moisture content (M) from wet weight (W)	0 - 100 %
Dry content [%] = Dry weight (D) from W	100 - 0 %
ATRO [%] $[(W-D) : D] \cdot 100 \%$	0 - 999 %
Moisture content (M)	Absolute value in [g]
Temperature range (in steps up to)	50 °C - 200 °C (1 °C)
Drying modes	<input type="checkbox"/> Standard drying <input type="checkbox"/> Drying in levels <input type="checkbox"/> Gentle drying <input type="checkbox"/> Rapid drying
Switch-off criteria	<ul style="list-style-type: none"> • Automatic unrestricted switch-off (Selectable loss in weight 0,01% - 0,1% in 30 s) • Time controlled switch-off (1 min - 12 h) • Manual switch-off at the press of a button
Recall of measurement/ Log output	Interval can be set from 1 s - 10 min (Only when used with printer or PC)
Overall dimensions WxDxH	204x336x167 mm
Net weight	4,6 kg
Price excl. of VAT ex works €	1650,-
Option DAkKS Calibr. Certificate Mass	KERN 963-127, € 98,-
Option Factory Calibr. Certificate Temperature	KERN 964-305, € 174,-

* application-dependent

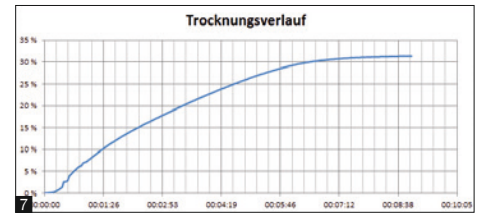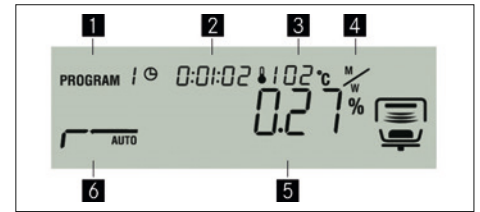

- The last value measured remains on the display until it is replaced by a new measurement
- Password protection to prevent manipulation of stored settings, data, etc.
- Sample description for up to 99 samples, 2 digits, freely programmable, and is printed in the measuring protocol
- Date and time display as standard
- USB data interface for transferring weighing data to the PC, printer etc.
- 10 sample plates included
- Protective working cover included with delivery
- Application handbook: In the download centre you will find a practical application handbook containing many examples, field reports, settings and tips for each KERN moisture analyser

Accessories

- Protective working cover, scope of delivery 5 items, KERN DBS-A03S05, € 44,-
- Sample plates aluminium, ø 90 mm, unit of 80 pieces, KERN MLB-A01A, € 45,-
- Round fiberglass filter, medium mechanical stability, without organic binder, box of 100 pieces, KERN RH-A02, € 86,-
- Temperature calibration set consists of measuring sensor and display device, KERN DBS-A01., € 570,-
- USB 2.0 cable, KERN DBS-A04, € 28,-
- Software BalanceConnection, for flexible recording or transmission of measured values, in particular also to Microsoft® Excel or Access as well as transfer of this data to other Apps and programs, Scope of supplies: Download link for 1 license, KERN SCD-4.0-DL, € 210,-
- Thermal printer, KERN YKB-01N, € 380,-
- Matrix needle printer, to print the weights on normal paper, ideal for long-term archiving, KERN 911-013, € 480,-
- Affordable universal label printer to print out weights on thermal labels. ASCII-capable. Convenient Auto-Forward function to automatically jump from label to label (only with KERN standard labels), KERN YKE-01, € 790,-



5

Moisture analyser with intuitive graphic display and step-by-step user guidance in 6 languages

Features

- Rapid and efficient operation thanks to the graphics display
 - Backlit LCD graphic display, digit height 11 mm
 - 6 direct keys for rapid access to the main functions
- Home screen:**
- 1 Main menu
 - 2 Start drying process
 - 3 Select drying temperature


- 4 Select shut-off criteria
 - 5 Setting to zero/taring
 - 6 Stand-by
- During measurement:**
- 7 Current temperature
 - 8 Current heating profile
 - 9 Active switch-off criteria
 - 10 Abort drying process
 - 11 Stop drying process
 - 12 Display current drying parameters
 - 13 Toggle the unit for displaying the results



KERN	DLB 160-3A
Readability [d] Weight/Moisture (%)	0,001 g / 0,01%
Weighing capacity [Max]	160 g
Reproducibility weight of sample 2 g*	0,15%
Reproducibility weight of sample 10 g*	0,05%
Display after drying (Display can be switched over at any time)	
Moisture [%] = Moisture content (M) from wet weight (W)	0 - 100 %
Dry content [%] = Dry weight (D) from W	100 - 0 %
ATRO [%] [(W-D) : D] · 100 %	0 - 999 %
Moisture content (M)	Absolutwert in [g]
Temperature range (in steps up to)	35 °C - 160 °C (1 °C)
Drying modes	<input type="checkbox"/> Standard drying <input checked="" type="checkbox"/> Rapid drying, preheating can be switched on
Switch-off criteria	<ul style="list-style-type: none"> • Automatic unrestricted switch-off (Selectable loss in weight 1 mg/30 s–10 mg/30 s) • Time controlled switch-off (1 min - 99 min) • Manual switch-off at the press of a button
Log output	Interval adjustable (5 s - 250 s)
Overall dimensions WxDxH	240x365x180 mm
Net weight	4,82 kg
Price excl. of VAT ex works €	1490,-
Option DAKKS Calibr. Certificate Mass	KERN 963-127, € 98,-
Option DAKKS Calibr. Certificate Temperature	KERN 964-305, € 174,-

* application-dependent

ONLY WHILE STOCKS LAST

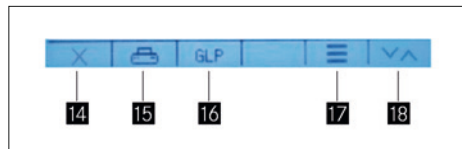

At the end of the measurement:

- 14 Exit drying program
 - 15 Print measurement report
 - 16 (De)activate, edit GLP parameters
 - 17 Display detailed result
 - 18 Toggle the unit for displaying the results
- 400 W halogen-quartz glass heater
 - User guidance in 6 languages (DE, EN, FR, IT, ES, PT)
 - Automatic taring when starting a measurement by closing the lid
 - The last value measured remains on the display until it is replaced by a new measurement
 - 19 Internal GLP; printout of balance ID, project ID, user ID, values determined by the drying process etc.
 - 10 sample plates included
 - Protective working cover included with delivery
 - Application handbook: In the download centre you will find a practical application handbook containing many examples, field reports, settings and tips for each KERN moisture analyser

Accessories

- Protective working cover, scope of delivery 5 items, KERN ALJ-A01S05, € 44,-
- Sample plates aluminium, ø 90 mm, unit of 80 pieces, KERN MLB-A01A, € 45,-
- Round fiberglass filter, medium mechanical stability, without organic binder, box of 100 pieces, KERN RH-A02, € 86,-
- Round fiberglass filter, medium mechanical stability, without organic binder, box of 100 pieces, KERN YMF-A01, € 45,-
- Temperature calibration set consists of measuring sensor and display device KERN DLB-A01N., € 570,-
- Thermal printer, KERN YKB-01N, € 380,-
- Matrix needle printer, to print the weights on normal paper, ideal for long-term archiving, KERN 911-013, € 480,-

KERN & SOHN GmbH

Balances, Test Weights, Microscopes,
DAkkS Calibration Laboratory
Ziegelei 1
72336 Balingen
Germany
Tel. +49 7433 9933-0
info@kern-sohn.com
www.kern-sohn.com

**The oldest Precision Balance
Factory in Germany**



**Discover the multifaceted World of Balances, Microscopes and Measuring Technology
from KERN online: www.kern-sohn.com**



- Full KERN & SAUTER Product Range
- Convenient 24/7 Ordering
- Selection of more than 5,000 Items across Weighing and Measuring Technology, Optical Instruments as well as Accessories and Services
- Extensive Information and useful Download Options
- Technical Product Data Sheets
- Operating Instructions
- Descriptive Image and Video Material
- Useful KERN Services
- Technical Glossary
- KERN Dealer Portal
- Practical Filter and Search Functions



Follow us on our social media channels too



Printed in Germany by KERN & SOHN GmbH
z-cb-en-kr-20241

