

PALLET TRUCK SCALES





KERN Pictograms



Internal adjustingQuick setting up of the balance's accuracy with internal adjusting weight (motordriven)



Adjusting program CAL For quick setting up of

the balance's accuracy. External adjusting weight required



EasyTouch

Suitable for the connection, data transmission and control through PC or tablet



Memory

Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.



Alibi memory

Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard.



KERN Universal Port (KUP)

allows the connection of external KUP interface adapters, e.g. RS-232, RS-485, SB, Bluetooth, WIFI, Analogue, Ethernet etc. for the exchange of data and control commands, without installation



RS-232 Data interface

To connect the balance to a printer, PC or network



RS-485 Data interface

To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible



USB Data interface

To connect the balance to a printer, PC or other peripherals



Bluetooth* Data interface To transfer data from the

balance to a printer, PC or other peripherals



WIFI Data interface

To transfer data from the balance to a printer, PC or other peripherals



Control outputs

(optocoupler, digital I/O) To connect relays, signal lamps, valves, etc.



Analogue interface

to connect a suitable peripheral device for analogue processing of the measurements



Interface for second balance

For direct connection of a second balance



Network interface

For connecting the scale to an Ethernet network



KERN Communication Protocol (KCP)

It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems



GLP/ISO log intern The balance displays weight, date and time independent of a printer connection



GLP/ISO log PrinterWith weight, date and time.
Only with KERN printers.



Piece counting Reference quantities

selectable. Display can be switched from piece to weight



Recipe level A

The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out



Recipe level B

Internal memory for complete recipés with name and target value of the recipe ingredients. User guidance through display



Totalising level A

The weights of similar items can be added together and the total can be printed out



Percentage determination

Determining the deviation in % from the target value (100 %)



Weighing units

Can be switched to e.g. nonmetric units. See balance model. Please refer to KERN's website for more details



Weighing with tolerance range (Checkweighing)

Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model



Hold function

(Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value



Protection against dust and water splashes IPxx The type of protection is

shown in the pictogram Suspended weighing



balance

Battery operationReady for battery operation. The battery type is specified for each device

Load support with hook

on the underside of the



Rechargeable battery pack

Rechargeable set



Universal plug-in power supply

with universal input and optional input socket adapters for A) EU, CH, GB B) EU, CH, GB, US C) EU, CH, GB, US, AUS



Plug-in power supply 230V/50Hz in standard version for EU, CH. On request GB, USA or AUS

version available



Integrated power supply unit

Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request



Weighing principle Strain gauges

Electrical resistor on an elastic deforming body



Weighing principle **Tuning fork**

A resonating body is electromagnetically excited, causing it to oscillate



Weighing principle Electromagnetic force compensation

Coil inside a permanent magnet. For the most accurate weighings



Weighing principle Single cell technology

Advanced version of the force compensation principle with the highest level of precision



Conformity Assessment

The time required for conformity assessment is specified in the pictogram



DAkkS calibration possible (DKD)

The time required for DAkkS calibration is shown in days in the pictogram



Factory calibration (ISO)

The time required for Factory calibration is shown in days in the pictogram



Package shipment

The time required for internal shipping preparations is shown in days in the pictogram



Pallet shipment


The time required for internal shipping preparations is shown in days in the pictogram

KERN Models A-Z

440	30
572	34
A	
ABP	50-51
ABP-A	
ABT-NM	
ACS/ACJ	
ADB/ADJ	
ALS-A/ALJ-A	
BFB	124-125
BFN	
BIC	
	_ 122-125
C CD C1 CD C2 CD D1	1/0
CB Q1 · CB Q2 · CB P1	
CCA	
CCS	
CDS	
CE Hx	
CFS	
CH	
CIB	
CJ P · CJ X	
CKE	
CM	
CO Y1 · CO Y2 · CO Y5	162
CP P4 · CP Y4 · CP P1 · CP Y1 · CP P3 _	
CP P2 · CP P8 · CP P7 · CP P9	
CR Q1 · CR P1 · CR Y1	
CT Q1 · CT P1 · CT P2	
CPB	89
CXB/CXB-NM	88
D	
DAB	
DBS	
DE	
DLB	
DS	115
E	
ECB-N/ECE-N	59
EFS	
EG-N/EW-N	37
EHA	
EMB	
EMB-V	15
EMS	16
EOB	
EOC	108-109
EOE	
EOS	
	31

IF	
FCB	61
FCE-N	
FCF	69
FES/FEJ	
FFN	74
FGE	68
FKB	
FOB-LM	70
FOB-S · FOB-NS	71
FOB · FOB-NL	72
FXN · FXN-M	75
G	
GAB-N	64
Н	
HCB	171
HCD	173
HCN	172
HDB-N · HDB-XL	
HFA	
HFC	
HFD	
HFM	
I	
IFB	114
IFC E	112-113
IFS	
IOC	110-111
	 116-117
K	
KBP-V20 IP65 WV	152
	132 139
KFA-V20	
KFB-TM	
KFC-TM	
KFD-V20	
KFD-V40 IP68	
KFN-TM	149
KFP-V20 IP65	
KFP-V20 IP67	
	154
KFP-V40 IP68 w	
KFS-TM	
KFU-V20	
KFU-V30	
KGP	
KIB-TM	
KIP-V20M	
KXC-TM	
KXP-V20 IP65	152

N	
NFB	133
NIB	132
NFN	134
Р	
PBJ/PBS	39
PCB	28-29
PCD	26
PCJ 🚾	32-33
PEJ/PES	40
PFB	27
PLJ/PLS	35
PNS/PNJ	36
PWS	38
R	
RIB	80
RPB	81
S	
SCD-4.0	186
SCD-4.0-PRO	187
SFB/SFB-H	78
SFE	118
SXC 🚾	76-77
Т	
TGC	11
TGD	11
U	
UFA	127
UFB	130
UFN	131
UIB	128
UID	129
V	
VHB	165
W	
WTB	73
Υ	
YKV	137
YRO-01/-02/-03	192

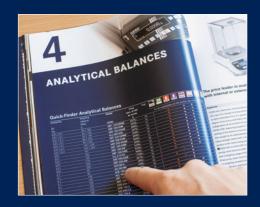

KERN Quick-Finder

How I quickly find the product I am looking for

Ahead of each product group allows you to base the search for a certain target group on weighing data you need such as readout, weighing capacity and main features for each model.

And it's as simple as that – find the product you want in 2 steps:


- 1. Go to the product group index on page 3
- 2. Pick the appropriate product group and find the product you want using the Quick-Finder













Pallet truck scale with complete protection against dust and water splashes IP65/67 and a memory for a container weight

Features

- PRE-TARE function for manual subtraction of a known container weight, useful for checking fill-levels
- 1 Display device: Plastic, protected against dust and water splashes IP65
- 2 Load fork: Protection against dust and water splashes IP67, temporary use in wet areas possible
- Pivot range 206°
- · Castors: Solid rubber on aluminium rims
- 3 Load rollers: Tandem tyres to overcome thresholds and obstacles more easily
- · Summation of weight values
- Ready for use: Batteries included, 4×1.5 V AA, operating time up to 80 h

Technical data

- Large LCD display, digit height 28 mm
- Permissible ambient temperature -10 °C/40 °C

Accessories

 Castors made of polyurethane on aluminium rims. Ideal for light-coloured flooring as they leave less visible abrasive marks. Suitable for the current models of the pallet truck scale range KERN VHB (when retrofitting, please give the serial number of the pallet truck scale available when ordering), scope of delivery: 1 item, KERN VHB-A02, € 140,-

! Shipment via freight forwarder. Please ask for dimensions, gross weight, shipping costs



















Model	Weighing capacity	Readability	Linearity	Net weight	Price excl. of VAT	Options DAkkS Calibr. Cert.	
	[Max]	[d]		approx.	ex works	DAkkS	
KERN	kg	kg	kg	kg	€	KERN	€
VHB 2T1	2000	1	± 2	110	1930,-	963-131	275,-

KERN & SOHN GmbH

www.kern-sohn.com


Balances, Test Weights, Microscopes, DAkkS Calibration Laboratory Ziegelei 1 72336 Balingen Germany Tel. +49 7433 9933-0 info@kern-sohn.com The oldest Precision Balance Factory in Germany



Discover the multifaceted World of Balances, Microscopes and Measuring Technology from KERN online: www.kern-sohn.com



- → Full KERN & SAUTER Product Range
- → Convenient 24/7 Ordering
- → Selection of more than 5,000 Items across Weighing and Measuring Technology, Optical Instruments as well as Accessories and Services
- → Extensive Information and useful Download Options
- → Technical Product Data Sheets
- → Operating Instructions
- → Descriptive Image and Video Material
- → Useful KERN Services
- → Technical Glossary
- → KERN Dealer Portal
- → Practical Filter and Search Functions

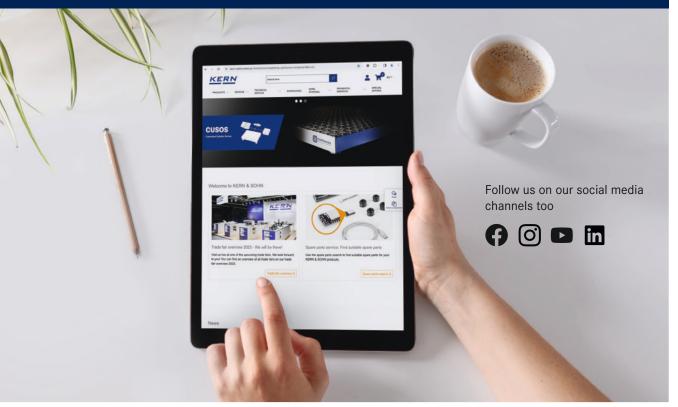

Printed in Germany by KERN & SOHN GmbH z-cb-en-kp-20241







