

DIGITAL REFRACTOMETERS – TYPE: HAND-HELD

PROFESSIONAL MEASURING



KERN Pictograms

 360° rotatable microscope head	 Fluorescence illumination for compound microscopes With 100 W mercury lamp and filter	 Integrated scale In the eyepiece	 Battery operation Ready for battery operation. The battery type is specified for each device.
 Monocular Microscope For the inspection with one eye	 Fluorescence illumination for compound microscopes With 3 W LED illumination and filter	 SD card For data storage	 Battery operation rechargeable Prepared for a rechargeable battery operation
 Binocular Microscope For the inspection with both eyes	 Phase contrast unit For a higher contrast	 USB 2.0 interface For data transmission	 Plug-in power supply 230V/50Hz in standard version for EU. On request GB, AUS or USA version.
 Trinocular Microscope For the inspection with both eyes and the additional option for the connection of a camera	 Darkfield condenser/unit For a higher contrast due to indirect illumination	 USB 3.0 interface For data transmission	 Integrated power supply unit Integrated in microscope. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request.
 Abbe Condenser With high numerical aperture for the concentration and the focusing of light	 Polarising unit To polarise the light	 WIFI data interface: For transmitting of the picture to a mobile display device	
 Halogen illumination For pictures bright and rich in contrast	 Infinity system Infinity corrected optical system	 HDMI digital camera For direct transmitting of the picture to a display device	
 LED illumination Cold, energy-saving and especially long-life illumination	 Zoom magnification For stereomicroscopes	 PC software To transfer the measurements from the device to a PC.	 Package shipment The time required to manufacture the product internally is shown in days in the pictogram.
 Incident illumination For non-transparent objects	 Auto-focus For automatic control of the focus level	 Automatic temperature compensation For measurements between 10 °C and 30 °C	 Pallet shipment The time required to manufacture the product internally is shown in days in the pictogram.
 Transmitting illumination For transparent objects	 Parallel optical system For stereomicroscopes, enables fatigue-proof working	 Protection against dust and water splashes IPxx: The type of protection is shown in the pictogram cf. DIN EN 60529:2000-09, IEC 60529:1989+A1:1999 +A2:2013	
 Fluorescence illumination For stereomicroscopes			

Abbreviations

C-Mount	Adapter for the connection of a camera to a trinocular microscope	SLR camera	Single-Lens Reflex camera
FPS	Frames per second	SWF	Super Wide Field (Field number at least \varnothing 23 mm for 10 \times eyepiece)
H(S)WF	High (Super) Wide Field (Eyepiece with high eye point for wearers of glasses)	W.D.	Working Distance
LWD	Long Working Distance	WF	Wide Field (Field number up to \varnothing 22 mm for 10 \times eyepiece)
N.A.	Numerical Aperture		

KERN Models A – Z

OAB-L _____	110-111
OBE-12 · OBE-13 _____	16
OBE-S _____	67
OBL-12 · OBL-13 _____	16
OBL-14 · OBL-15 _____	18
OBL-S · OBN-S _____	68
OBN-13 · OBN-15 _____	20
OBN-14 _____	22
OBS-1 _____	10
OBT-1 _____	12
OCM-1 _____	24
ODC-2 _____	89
ODC-82 · ODC-83 · ODC-84 _____	86
ODC-85 · ODC-86 _____	87
ODC-87 · ODC-88 · ODC-89 _____	88
OIV-2 _____	64
OIV-3 _____	63
OIV-6 _____	65
OKM-1 _____	27
OKO-1 _____	29
OLM-1 _____	31
OPO-1 _____	34
ORA _____	94-100
ORL-B _____	107
ORM _____	101-106
OSE-4 · OZL-9 · OZM-9 _____	73
OSE-42 _____	38
OSF-4G _____	40
OXM-9 _____	90
OZB-H _____	82
OZB-IR _____	84
OZB-M _____	75-79
OZB-UE _____	81
OZB-UP _____	80
OZG-4 _____	58
OZL-44 _____	42
OZL-45 _____	48
OZL-45R _____	50
OZL-46 _____	44
OZL-47 _____	46
OZL-S _____	69
OZM-5 _____	52
OZM-9 _____	72
OZM-S · OZP-S _____	70
OZP-5 _____	54
OZS-5 _____	56
OXM-9 (Software OXM 901 · OXM 902) _____	90

KERN Customer Consultants

With questions about our products and services, we will be happy to advise you:

UK, IE, IS, FR, Maghreb, BE, LUX



Maren Möwert
Tel. +49 7433 9933 - 132
Mobil +49 151 46143240
maren.moewert@kern-sohn.com

Technical sales KERN Optics



Ralf Gutbrod
Tel. +49 7433 9933-306
optics@kern-sohn.com

DK, SE, FI, NO, PL, LV, LT, EE



Mark Hauder
Tel. +49 7433 9933 - 310
Mobil +49 160 3378426
mark.hauder@kern-sohn.com

Category Manager KERN Optics



Nicole Lebherz
Tel. +49 7433 9933-201
optics@kern-sohn.com

GR, CY, BG, HU, RO, SK, CZ, AL,
Ex-Yugoslavia, GUS



Ariana Sevcenco
Tel. +49 7433 9933 - 203
Mobil +49 151 72434692
ariana.sevcenco@kern-sohn.com

Sales & Marketing Manager



Stephan Ade
Tel. +49 7433 9933-121
Mobil +49 171 3060086
ade@kern-sohn.com

North America, Near- & Middle East,
Africa, Asia, Oceania, TR



Corinna Matthes
Tel. +49 7433 9933 - 215
Mobil +49 151 44568364
corinna.matthes@kern-sohn.com

KERN Hotlines

Technical questions about our products?
You will find assistance here quickly: **+49 7433 9933- ...**



Service Hotline

→ 199

for general technical questions about your KERN product

Optical Devices

→ 777

for all technical questions concerning our microscopes, microscope cameras, refractometers, etc.

Laboratory and Analytical Balances

→ 444

for all technical questions concerning our high quality precision balances, analytical balances (especially with electromagnetic force-compensated measuring systems, tuning fork and high application density)

SAUTER Measuring Instruments

→ 555

for all technical questions concerning our SAUTER measuring instruments, test benches, force measuring accessories (clamps etc.), SAUTER software

System Solutions Industry 4.0

→ 200

for all technical questions concerning the interlocking of the latest information and communication technology with our scales, load cells and measuring devices as well as questions about KERN software

Calibration and Verification Service

→ 196

for any questions concerning our calibration and verification service



Transport and storage case



Rear view, screw-on battery compartment cover

Digital measurement of refraction index for universal application

Features

- The KERN ORM refractometers are accurate and universal maintenance free digital handheld refractometers
- They are characterized by their easy-using and robustness
- The typical and practical design is suitable for a quick and convenient everyday use
- The large, easy-to-read display with integrated temperature display supports the user to reliably determine the measurement
- The integrated automatic temperature compensation (ATC), avoids the manual conversion of the measurement. This allows a quick and efficient usage of the instrument
- Rapid, user-friendly calibration of the refractometer is possible at any time using standard commercial distilled water
- The refractometers from the KERN ORM range are protected to international IP65 protection class, against dust and water splashes. After use, you can rinse the refractometer under running water
- Mean value measurements possible
- The following accessory-parts are included:
 - Prism cover lid
 - Pipette
 - Storage box
 - 1 x AAA battery
 - Screwdriver

Technical data

- Measurement temperature: 0 °C – 40 °C
- Overall dimensions WxDxH 121x58x25 mm
- Net weight approx. 289 g
- Power supply: 1 x AAA (1,5 V)
- Lifetime of the battery: approx. 10.000 measurements
- ATC (Automatic Temperature Compensation)
- Minimum sample volume: 4 drops
- Automatic energy management (AUTO-OFF after 60 seconds)
- Mean value measurement (15 measurements)

Accessories

- Calibration liquid

! Also available with calibration certificate, see page 108!

STANDARD




Scope of application: Basic measurements for Brix and refractive index

The following models are particularly suitable for basic measurement where the result is required in Brix or refractive index. They are used to determine the sugar content in food or for monitoring processes in the industry (coolant monitoring, water-based mixtures). Alternatively the display can be switched to show Brix or the refractive index.

The main scope of applications is:

- Industry: Monitoring of lubricants in machines and quality control
- Food industry: Beverages, fruits and sweets
- Agriculture: Determination of the degree of ripeness of fruit for quality control in harvesting
- Restaurants and large-scale catering establishment

Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 50BM	Brix	0 – 50 %	± 0,2 %	0,1 %	370,-
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	
ORM 1RS	Brix	0 – 90 %	± 0,2 %	0,1 %	470,-
	Refractive index	1,3330 – 1,5177 nD	± 0,0003 nD	0,0001 nD	

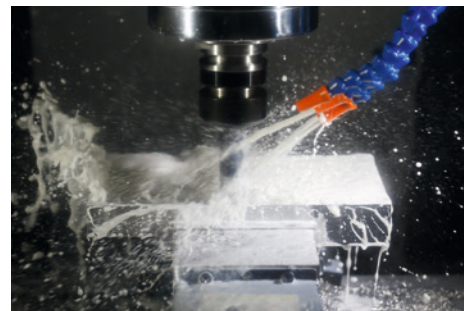

Scope of application: Sugar

The following models are particularly suitable for direct measurement of different types of sugar. These are used to determine the content of the respective type of sugar in water-based liquids. It is possible to switch between the four different scales.

The main scope of applications is:

- Food industry: Beverages, fruits and sweets
- Agriculture: Determination of the degree of ripeness of fruit for quality control in harvesting
- Restaurants and large-scale catering establishment



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1SU	Fructose	0 – 69 %	± 0,2 %	0,1 %	470,-
	Glucose	0 – 60 %	± 0,2 %	0,1 %	
	Brix	0 – 90 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,5177 nD	± 0,0003 nD	0,0001 nD	
ORM 2SU	Lactose	0 – 17 %	± 0,2 %	0,1 %	370,-
	Maltose	0 – 16 %	± 0,2 %	0,1 %	
	Dextran	0 – 11 %	± 0,2 %	0,1 %	
	Brix	0 – 50 %	± 0,2 %	0,1 %	

Scope of application: Honey

The following model is particularly suitable for the measurement of the water content in honey according to the International Honey Commission (IHC2002) and “degrees Baumé” to determine the relative density of liquids. Alternatively the display can be switched to show Brix or the refractive index.

The main scope of applications is:

- Beekeeping
- Honey production



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1HO	Brix	5 – 38 %	± 0,2 %	0,1 %	470,-
	Baumé	33 – 48 °Bé	± 0,2 °Bé	0,1 °Bé	
	Water content	0 – 90 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,5177 nD	± 0,0003 nD	0,0001 nD	

Scope of application: Salt

The following models are particularly suitable to determine the concentration of NaCl (salt) in water and seawater. This is often used for the preparation and for the cooking of sauces, bases for pastries, the production of brines (e.g. for white cheese) and the preparation of seafood and marinades for meat. Alternatively the display can be switched to show Brix or the refractive index.

The main scope of applications is:

- Food industry
- Restaurants, and large-scale catering establishment, canteens
- Fisch farm



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1NA	Salt content (NaCl) %	0 – 28 %	± 0,2 %	0,1 %	370,-
	Salt content (NaCl) ‰	0 – 280 ‰	± 2 ‰	1 ‰	
	Salt content (specific gravity)	1,000 – 1,220	± 0,002	0,001	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
ORM 1SW	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	370,-
	Salt content seawater	0 – 100 ‰	± 2 ‰	1 ‰	
	Chlorine content seawater	0 – 57 ‰	± 2 ‰	1 ‰	
	Salt content (specific gravity)	1,000 – 1,070	± 0,002	0,001	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	

Scope of application: Beer/alcohol

The following models are particularly suitable for determining the sugar content of the original wort of beer in its unfermented state. The value can be read straightaway, without having to be converted, using the Original gravity (specific weight) and Degrees Plato scales. In addition, the percent by volume and percent by mass scales can be used to determine the alcohol content of clear spirits.

The main scope of applications is:

- Beer brewers
- Alcohol production



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1AL	Percentage by mass	0 – 72 %	± 1 %	1 %	370,-
	Percentage by volume	0 – 80 %	± 1 %	1 %	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	
ORM 1BR	Plato	0 – 31 °P	± 0,3 °P	0,1 °P	370,-
	Original gravity (specific weight)	1,000 – 1,130	± 0,002	0,001	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	

Scope of application: Wine

The following models are particularly suitable for the measurement of the sugar content in fruit. It indicates the expected °Alcohol of the fruit. The degree of ripeness of fruit (fruit-sugar) can also be determined, such as e.g. grapes. Alternatively the display can be switched to show Brix.

The main scope of applications is:

- Agriculture: Wine-growing (viticulture) and fruit-growing
- Wine-production
- Must and alcohol production



°Oe = Degree Oechsle, °KMW = Klosterneuburger Most Waage

Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1WN	Oechsle	0 – 150 °Oe	± 2 °Oe	1 °Oe	370,-
	Percentage by volume	0 – 22 %	± 0,2 %	0,1 %	
	KMW (Babo)	0 – 25 °KMW	± 0,2 °KMW	0,1 °KMW	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
ORM 2WN	Oechsle France	0 – 230 °Oe	± 2 °Oe	1 °Oe	370,-
	Percentage by volume	0 – 22 %	± 0,2 %	0,1 %	
	KMW (Babo)	0 – 25 °KMW	± 0,2 °KMW	0,1 °KMW	
	Brix	0 – 50 %	± 0,2 %	0,1 %	

Scope of application: Coffee

The following models are particularly suitable for measuring the dissolved solids (TDS) in coffee to determine or compare the strength of a cup of coffee. For roasting plants, the TDS% value is used to determine the solubility level of a roast and to control the quality. Alternatively the display can be switched to show Brix or the refractive index.



The main scope of applications is:

- Coffee industry
- Coffee roasting plants
- Coffee competitions



Modell	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1CO	Coffee TDS 1	0 – 25 %	± 0,2 %	0,1 %	370,-
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	
ORM 2CO	Coffee TDS 2	0,00 – 25,00 %	± 0,2 %	0,01 %	370,-
	Brix	0,00 – 30,00 %	± 0,2 %	0,01 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	

Scope of application: Urine

The following models are particularly suitable for the measurement of the specific gravity (sg) in urine, the quantity of serum (serumproteine) in urine (doping control among athletes), and the refractive index.



The main scope of applications is:

- Hospitals
- Doctor's surgeries/Physicians
- Medical training institutions
- Nursing homes
- Sports medicine (doping test)
- Veterinary

Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1UN	Urine (spec. gravity)	1,000 – 1,050	± 0,002	0,001	370,-
	Serum protein	0 – 12 g/100 ml	± 0,2 g/100 ml	0,1 g/100 ml	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	
ORM 2UN	Urine (s. g. dog)	1,000 – 1,060	± 0,002	0,001	370,-
	Urine (s. g. cat)	1,000 – 1,060	± 0,002	0,001	
	Brix	0 – 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 – 1,4200 nD	± 0,0003 nD	0,0001 nD	



Scope of application: Industry/Automotive

The following models are particularly suitable for the measurement and determination of AdBlue®, glycol concentration ethylene (EG) and propylene (PG), battery fluid (BF), urea, the freezing point of windscreen wash water (CW). Furthermore these models are suitable for the measurement of thermal exchange systems. Alternatively the display can be switched to show Brix or the refractive index.

The main scope of applications is:

- Automotive industry: Car-workshops and producers
- Chemical industry
- Solar industry: Antifreeze monitoring



Model	Scales	Measuring range	Accuracy	Division	Price excl. of VAT ex works €
KERN					
ORM 1CA	Wash water	(-60) - 0 °C	± 0,5 °C	0,1 °C	370,-
	AdBlue®	0 - 51 %	± 0,2 %	0,1 %	
	Battery fluid	1,000 - 1,500 kg/l	± 0,005 kg/l	0,001 kg/l	
	Brix	0 - 50 %	± 0,2 %	0,1 %	
	Refractive index	1,3330 - 1,4200 nD	± 0,0003 nD	0,0001 nD	
ORM 2CA	Ethylene glycol (%)	0 - 100 %	± 0,5 %	0,1 %	470,-
	Ethylene glycol (° C)	(-50) - 0 °C	± 0,5 °C	0,1 °C	
	Propylene glycol (%)	0 - 100 %	± 0,5 %	0,1 %	
	Propylene glycol (°C)	(-60) - 0 °C	± 0,5 °C	0,1 °C	
	Brix	0 - 90 %	± 0,2 %	0,1 %	



KERN & SOHN GmbH

Balances, Test Weights, Microscopes,
DAkkS Calibration Laboratory
Ziegelei 1
72336 Balingen
Germany
Tel. +49 7433 9933-0
info@kern-sohn.com
www.kern-sohn.com


**The oldest Precision Balance
Factory in Germany**



Discover the multifaceted World of Balances, Microscopes and Measuring Technology from KERN online: www.kern-sohn.com



- Full KERN & SAUTER Product Range
- Convenient 24/7 Ordering
- Selection of more than 5,000 Items across Weighing and Measuring Technology, Optical Instruments as well as Accessories and Services
- Extensive Information and useful Download Options
- Technical Product Data Sheets
- Operating Instructions
- Descriptive Image and Video Material
- Useful KERN Services
- Technical Glossary
- KERN Dealer Portal
- Practical Filter and Search Functions

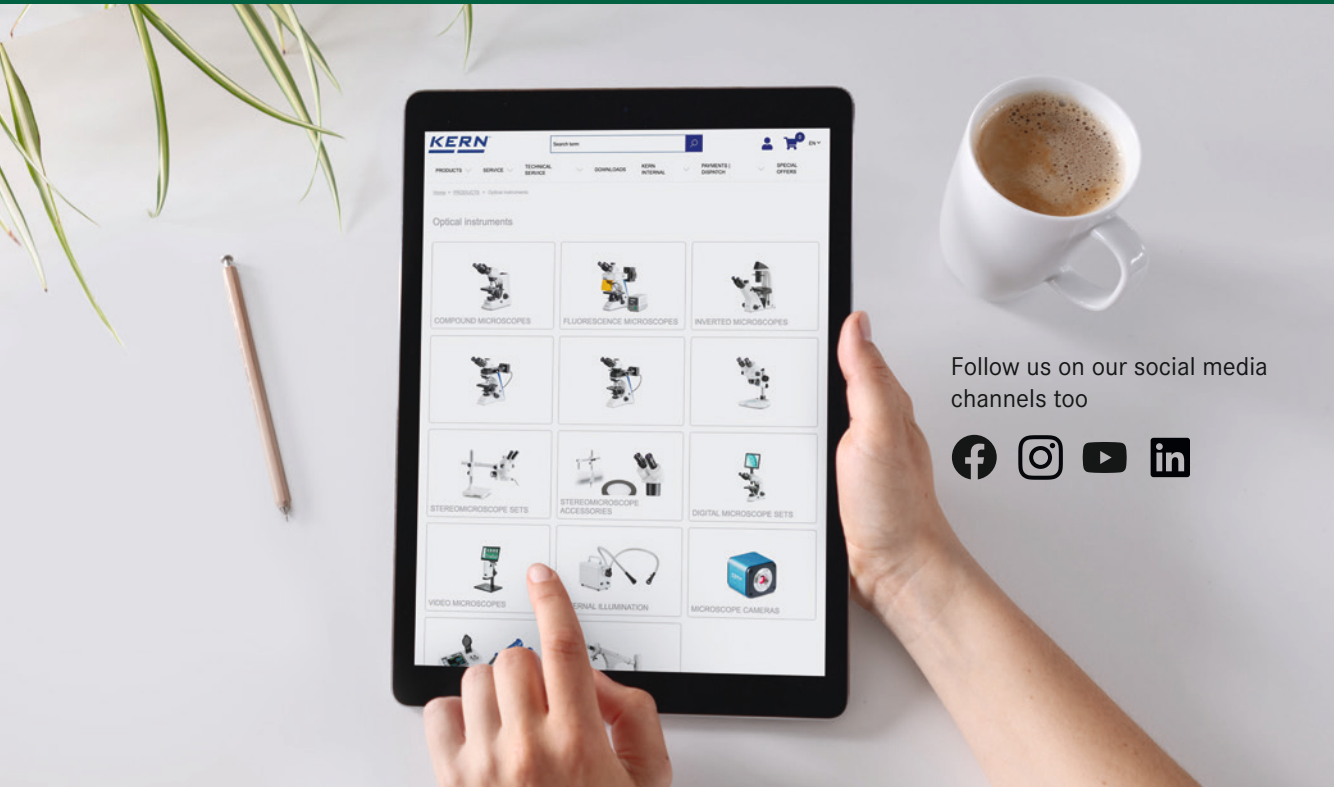

Follow us on our social media channels too



Printed in Germany by KERN & SOHN GmbH
z-co-en-kr-2024 1

