

# KERN PLS 1200-3A

# KERN

High-quality precision scale with comfortable graphic display and enormous weighing range



Possible calibration points	1 kg
Stabilization time	2 s
Warm-up time	8 h
Eccentric loading at 1/3 [Max]	0,005 g
Maximum creep (15 minutes)	10 mg
Maximum creep (30 minutes)	20 mg

<b>Approval</b>	
CE mark	✓

<b>Display</b>	
Display type	LCD graphic
Display screen size	132×38 mm
Display backlight	✓
Display digit height - smallest digit	4 mm
Display digit height	15 mm
Languages of the user interface	English

<b>Construction</b>	
Dimension housing (W×D×H)	210×340×120 mm
Dimensions ring-shaped draught shield - inner (Ø×H)	150×60 mm
Dimensions ring-shaped draught shield - outer (Ø×H)	160×70 mm
Dimensions completely mounted (W×D×H)	210×340×160 mm
Material housing	plastic
Material weighing plate	stainless steel
Material platform	Stainless steel
Material draught shield	glass
Dimensions weighing surface (Ø)	110 mm
Levelling feet adjustable	✓

<b>Functions</b>	
Number of keys for operation	6
Auto-off interval(s) in mains power mode	off 5 min 2 min 15 min
Capacity - Display	✓
Time display	✓
Tare function	manual (multi)
Density determination	✓
Percentage determination	✓
Counting function	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual

<b>Category</b>	
Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PLS

<b>Measuring System</b>	
Construction type of the scale	Single-range balance
Weighing system	Force compensation
Weighing capacity [Max]	1200 g
Weighing capacity [Max] (ct)	6000 ct
Readability [d]	0,001 g
Readability carat [d] (ct)	0,01 ct
Resolution	1.200.000
Linearity	± 0,003 g
Reproducibility	0,001 g
Default unit	g

Units	g mg gn dwt tl (Tw) tl (HK) ozt tl (Singap, Malays) ct mo lb oz
-------	--

USP Minimum weight of sample (k = 2, U = 0.1%)	2 g
Adjustment options	Adjusting with external weight
Recommended adjusting weight	1 kg (E2)

# KERN PLS 1200-3A

# KERN

High-quality precision scale with comfortable graphic display and enormous weighing range

Function for averaging under unstable weighing conditions	✓
Standby function	✓
Recipe/summing level	Rez B (Net-total, memory with plain text designations + setpoint, also for printout)
Recipe weighing - number of database entries	99
Recipe weighing - number of ingredients per database entry	20
Underfloor weighing	Eye (included in delivery)
Interfaces	RS-232 standard

## Counting

Smallest piece weight when piece counting - laboratory conditions	5 mg
Smallest piece weight when piece counting - normal conditions	50 mg
Counting reference weight can be entered	✓
Reference quantity	10, 25, 50, 100, n (any number of pieces)
Counting resolution (laboratory conditions)	240.000

## Power Supply

Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Input voltage device / power [Max]	24 V 1 A
Plug-in power supply type	Power adapter
Supplied power supply	Power supply unit
	EURO
Plug-in power supply / adapter for countries - included with the delivery	AUS UK US CH
	EURO
Plug-in power supply / adapter for countries - optional	UK US CH

## Environmental conditions

Humidity of environment [Max]	80 %
Ambient temperature [Min]	15 °C
Ambient temperature [Max]	35 °C
Storage temperature [Max]	40 °C

## Packing & Shipping

Readability force [d] (N)	1 d
---------------------------	-----


Dimensions packaging (W×D×H)	500×360×420 mm
Net weight	4,8 kg
Shipping method	Parcel service
Net weight approx.	4,8 kg
Gross weight approx.	7 kg
Shipping weight	15,1 kg

## Services (optional)

Article number for DAkkS calibration	963-103
Article number for certificate of conformity (verification)	969-517

## Pictograms

### STANDARD

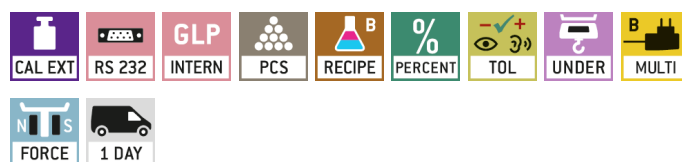

### OPTION

